

VNS2500

Wireless Mass Notification and Personnel Alert System



The VNS2500 is the perfect, low cost, easy to use mass notification and personnel alert system that can wirelessly initiate voice and alphanumeric alerts to up to 1,000 controlled devices such as wireless PA speakers, alphanumeric signboards, two-way radios, pagers, wirelessly controlled sirens and strobe lights.

The VNS2500 can process information from a variety of sources including: telephones, alarm points, Fire/Alarm systems, weather alert stations, building automation, security systems and others.

Integrated with the optional AlertWave software package, designated alerts can be triggered by remote sensors, duress activators, a scheduler program, manually over the phone or from the command center.

The VNS2500 system is ideal for small to mid size mass notification and personnel alert applications.

FEATURES:

- Database for up to 1000 wirelessly controlled devices
- Voice and alphanumeric notification capability
- Telephone line interface
- Individual, zone and group notification capability
- 24 programmable alarm inputs
- Interfaces with a variety of RF transmitters
- Integrated LCD display and Keypad
- Wall or desk mounting

OPTIONS:

- Built-in low power or external high power transmitters
- AlertWave Windows based programming and control software package

BENEFITS:

- Reduce confusion, injury and mass casualties in the event of emergency
- Improve personnel response time in emergency situations
- Instant audible and/or silent visual alerts
- Requires minimal training and easy to install
- Enhances monitoring and alarm system capabilities
- Function as a wireless PA system in non-emergency situations
- All-in-one solution that can be easily expandable

CAMPUSES

GOVERNMENT FACILITIES

MILITARY BASES

MUNICIPALITIES

OFFICE BUILDINGS

MANUFACTURING PLANTS


TRANSPORTATION HUBS



Technical Specifications

VNS2500

Software	Optional AlertWave Windows based software package that designed to program, control and backup the system database.	Serial Port	One RS-232 serial port with 300-19200 BPS.
Capacity	1000 pager database and groups.	Transmitter	The VNS2500 can use a built-in internal 4-10W transmitter or an external 10-350W transmitter.
Alarm Inputs	Built-in 24 alarm points that can be monitored to generate a pre programmed alphanumeric, tone or voice alerts	Power	The VNS2500 operates from a 12VDC/ 3A power adapter.
Fast Alerts	100 pre programmed alphanumeric, tone or voice alerts that can be initiated from the unit keypad or over the phone	Microphone Interface	Optional local desktop microphone for 'live' voice alerts and PA announcements.
Telephone access	Built-in PABX telephone interface for remote alert activation and PA announcements.	Dimensions	9.7" wide x 2.4" high x 5.5" deep.

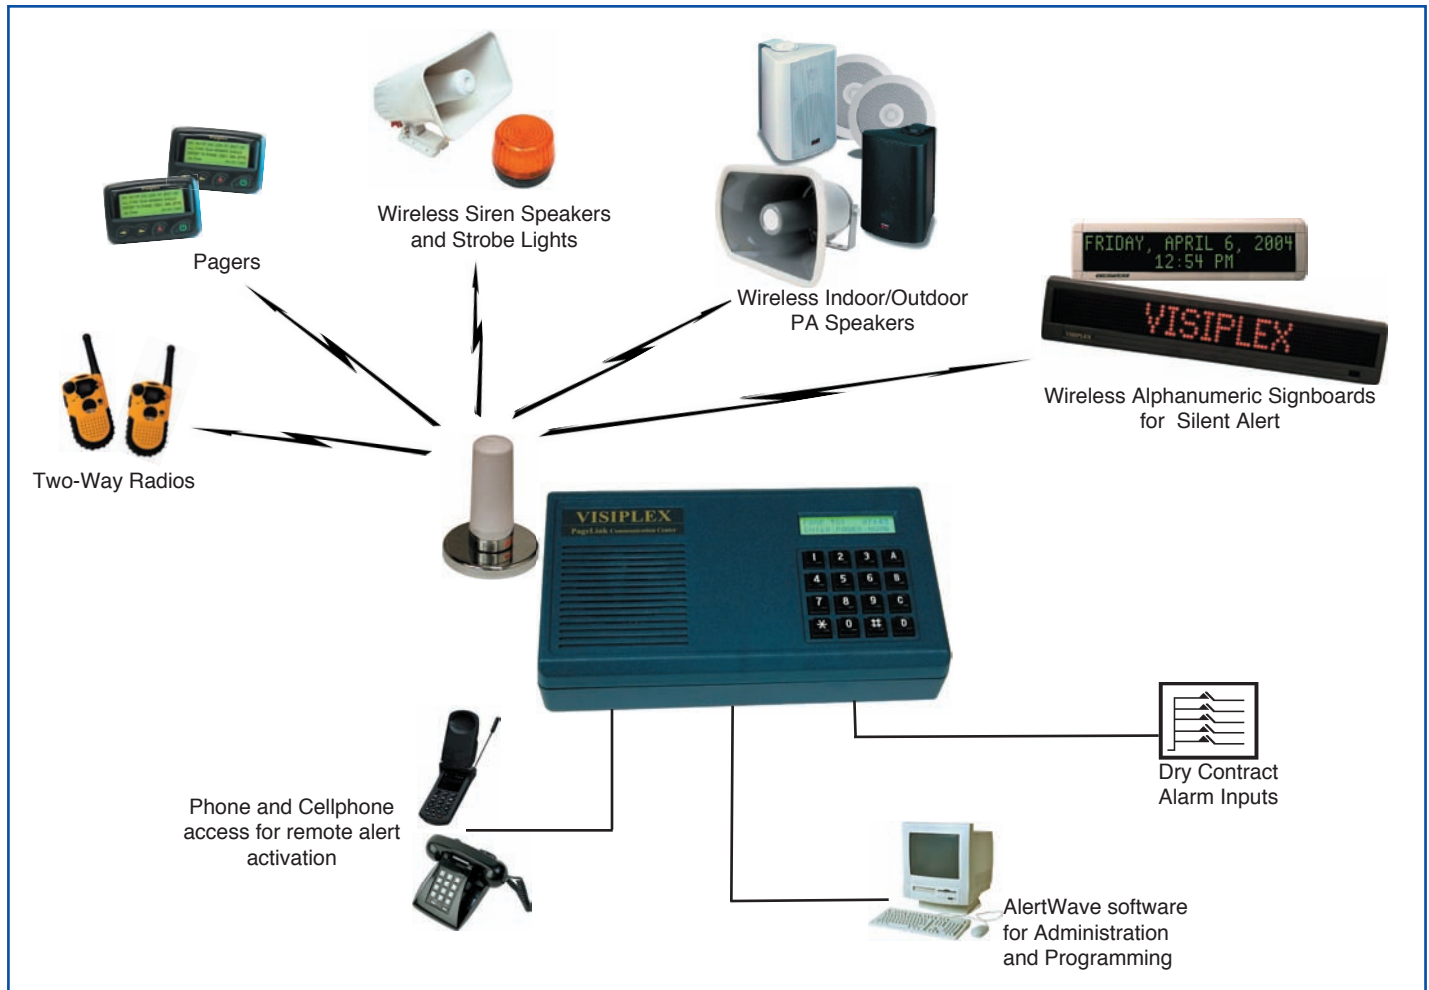

VNS2500 - Wireless Mass Notification and Personnel Alert System

020-4450474
 E-mail: sales@kehuco.com
 Web site: www.kehuco.com